

## 2.3W EI30/18 FAPE3018 SERIES



### FEATURES

Two compartments bobbin  
Self-extinguishing plastics UL94V-0  
Degree of protection IP67  
Weight: 0.112kg  
Temperature class to 70°C/B


### OPTIONS

Bulk packaging is standard  
Custom design available

### COMMON APPLICATIONS


Medical equipments  
Industrial equipments  
Industrial controls  
Test equipments  
Industrial computers  
Avionics & telecom

### PHYSICAL CHARACTERISTICS

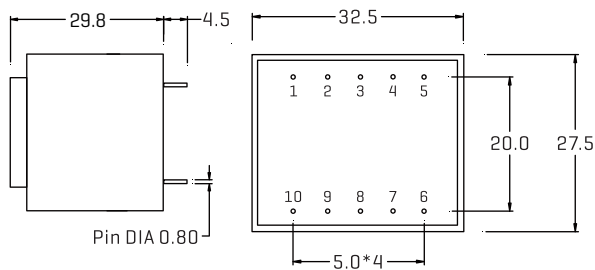

ALL DIMENSIONS IN MM

### TECHNICAL INFORMATION

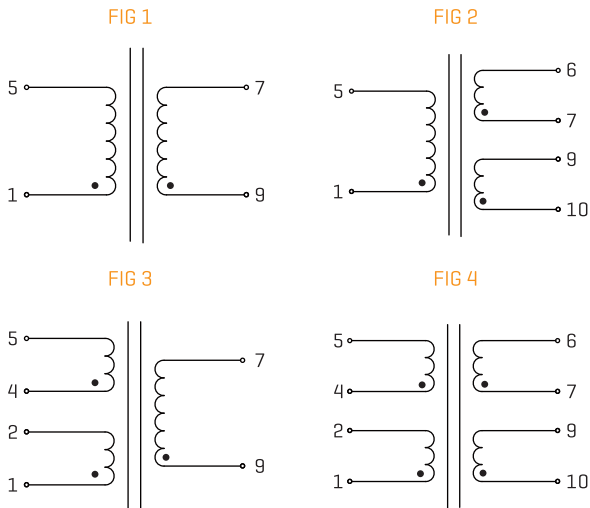

### ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
FAPE301857	230	6/384	10.0	1
FAPE301858	230	9/256	13.8	1
FAPE301859	230	12/192	18.6	1
FAPE301860	230	15/154	23.8	1
FAPE301861	230	18/128	27.8	1
FAPE301862	230	24/96	34.7	1
FAPE301863	230	2*6/192	2*10.0	2
FAPE301864	230	2*9/128	2*14.0	2
FAPE301865	230	2*12/96	2*17.5	2
FAPE301866	230	2*15/77	2*24.4	2
FAPE301867	230	2*18/64	2*29.3	2
FAPE301868	230	2*24/48	2*35.8	2
FAPE301869	115	6/384	10.0	1
FAPE301870	115	9/256	13.8	1
FAPE301871	115	12/192	18.6	1
FAPE301872	115	15/154	23.8	1
FAPE301873	115	18/128	27.8	1
FAPE301874	115	24/96	34.7	1
FAPE301875	115	2*6/192	2*10.0	2
FAPE301876	115	2*9/128	2*14.0	2
FAPE301877	115	2*12/96	2*17.5	2
FAPE301878	115	2*15/77	2*24.4	2
FAPE301879	115	2*18/64	2*29.3	2
FAPE301880	115	2*24/48	2*35.8	2
FAPE301881	2*115	6/384	10.0	3
FAPE301882	2*115	9/256	13.8	3
FAPE301883	2*115	12/192	18.6	3
FAPE301884	2*115	15/154	23.8	3
FAPE301885	2*115	18/128	27.8	3
FAPE301886	2*115	24/96	34.7	3
FAPE301887	2*115	2*6/192	2*10.0	4
FAPE301888	2*115	2*9/128	2*14.0	4
FAPE301889	2*115	2*12/96	2*17.5	4
FAPE301890	2*115	2*15/77	2*24.4	4
FAPE301891	2*115	2*18/64	2*29.3	4
FAPE301892	2*115	2*24/48	2*35.8	4

## 2.7W EI30/18 FAPE3018 SERIES


### FEATURES

Vacuum filling  
Two compartments bobbin  
Self-extinguishing plastics UL94V-0  
Degree of protection IP 00  
Weight: 0.112kg  
Temperature class to 50 °C/B

### COMMON APPLICATIONS


Medical equipments  
Industrial equipments  
Industrial controls  
Test equipment  
Industrial computers  
Avionics & telecom

### PHYSICAL CHARACTERISTICS

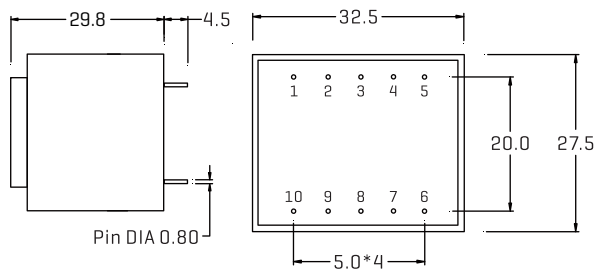

ALL DIMENSIONS IN MM

### TECHNICAL INFORMATION

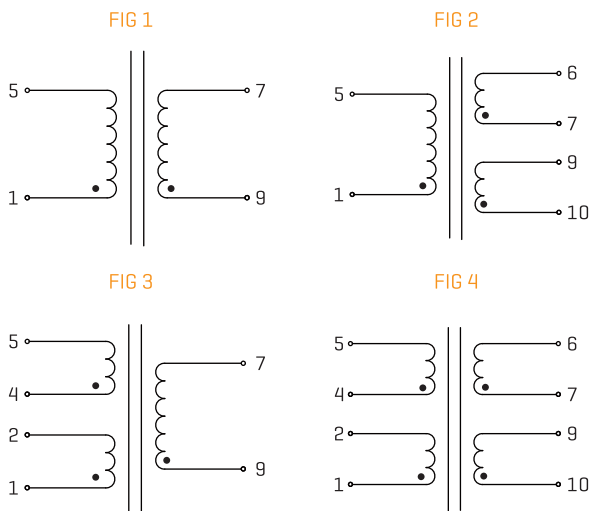

### OPTIONS

Bulk packaging is standard  
Custom design available



### ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
FAPE301893	230	6/450	10.5	1
FAPE301894	230	9/300	15.4	1
FAPE301895	230	12/225	21.1	1
FAPE301896	230	15/180	26.3	1
FAPE301897	230	18/150	30.9	1
FAPE301898	230	24/113	42	1
FAPE301899	230	2*6/225	2*10.5	2
FAPE3018100	230	2*9/150	2*15.4	2
FAPE3018101	230	2*12/113	2*21.1	2
FAPE3018102	230	2*15/90	2*26.3	2
FAPE3018103	230	2*18/75	2*30.9	2
FAPE3018104	230	2*24/57	2*42.0	2
FAPE3018105	115	6/450	10.5	1
FAPE3018106	115	9/300	15.4	1
FAPE3018107	115	12/225	21.1	1
FAPE3018108	115	15/180	26.3	1
FAPE3018109	115	18/150	30.9	1
FAPE3018110	115	24/113	42	1
FAPE3018111	115	2*6/225	2*10.5	2
FAPE3018112	115	2*9/150	2*15.4	2
FAPE3018113	115	2*12/113	2*21.1	2
FAPE3018114	115	2*15/90	2*26.3	2
FAPE3018115	115	2*18/75	2*30.9	2
FAPE3018116	115	2*24/57	2*42.0	2
FAPE3018117	2*115	6/450	10.5	3
FAPE3018118	2*115	9/300	15.4	3
FAPE3018119	2*115	12/225	21.1	3
FAPE3018120	2*115	15/180	26.3	3
FAPE3018121	2*115	18/150	30.9	3
FAPE3018122	2*115	24/113	42	3
FAPE3018123	2*115	2*6/225	2*10.5	4
FAPE3018124	2*115	2*9/150	2*15.4	4
FAPE3018125	2*115	2*12/113	2*21.1	4
FAPE3018126	2*115	2*15/90	2*26.3	4
FAPE3018127	2*115	2*18/75	2*30.9	4
FAPE3018128	2*115	2*24/57	2*42.0	4

## 2.8W EI30/18 FAPE3018 SERIES



### FEATURES

Vacuum filling  
Two compartments bobbin  
Self-extinguishing plastics UL94V-0  
Degree of protection IP 00  
Weight: 0.112kg  
Temperature class to 40 °C/B

### COMMON APPLICATIONS


Medical equipments  
Industrial equipments  
Industrial controls  
Test equipment  
Industrial computers  
Avionics & telecom

### OPTIONS

Bulk packaging is standard  
Custom design available




### PHYSICAL CHARACTERISTICS

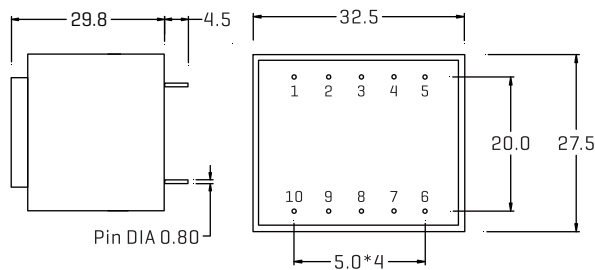

ALL DIMENSIONS IN MM

### TECHNICAL INFORMATION

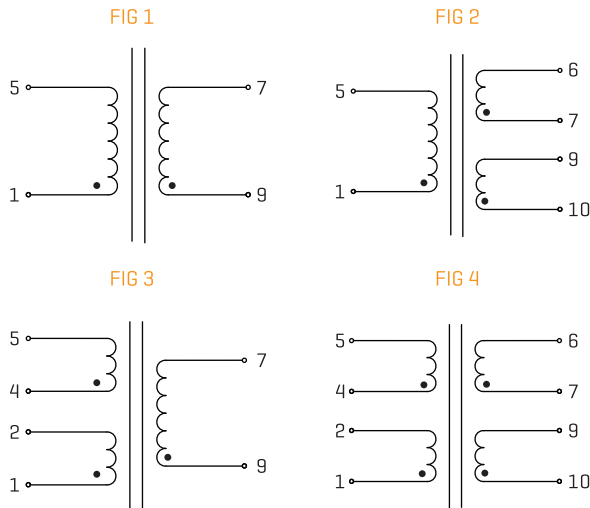

### ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
FAPE3018129	230	6/467	10.5	1
FAPE3018130	230	9/311	15.4	1
FAPE3018131	230	12/233	21.1	1
FAPE3018132	230	15/187	26.3	1
FAPE3018133	230	18/156	30.9	1
FAPE3018134	230	24/117	42	1
FAPE3018135	230	2*6/233	2*10.5	2
FAPE3018136	230	2*9/156	2*15.4	2
FAPE3018137	230	2*12/117	2*21.1	2
FAPE3018138	230	2*15/93	2*26.3	2
FAPE3018139	230	2*18/77	2*30.9	2
FAPE3018140	230	2*24/58	2*42.0	2
FAPE3018141	115	6/467	10.5	1
FAPE3018142	115	9/311	15.4	1
FAPE3018143	115	12/233	21.1	1
FAPE3018144	115	15/187	26.3	1
FAPE3018145	115	18/156	30.9	1
FAPE3018146	115	24/117	42	1
FAPE3018147	115	2*6/233	2*10.5	2
FAPE3018148	115	2*9/156	2*15.4	2
FAPE3018149	115	2*12/117	2*21.1	2
FAPE3018150	115	2*15/93	2*26.3	2
FAPE3018151	115	2*18/77	2*30.9	2
FAPE3018152	115	2*24/58	2*42.0	2
FAPE3018153	2*115	6/467	10.5	3
FAPE3018154	2*115	9/311	15.4	3
FAPE3018155	2*115	12/233	21.1	3
FAPE3018156	2*115	15/187	26.3	3
FAPE3018157	2*115	18/156	30.9	3
FAPE3018158	2*115	24/117	42	3
FAPE3018159	2*115	2*6/233	2*10.5	4
FAPE3018160	2*115	2*9/156	2*15.4	4
FAPE3018161	2*115	2*12/117	2*21.1	4
FAPE3018162	2*115	2*15/93	2*26.3	4
FAPE3018163	2*115	2*18/77	2*30.9	4
FAPE3018164	2*115	2*24/58	2*42.0	4