

4W UI30/7.5 FAUI3007 SERIES



FEATURES

Frequency 50/60Hz
 Potted under vacuum
 Split-bobbin
 Temperature class ta 70°C/B
 Weight: 0.145kg
 Packaging unit: 15 pieces [tray]
 Fixing material for 2.5mm [0.098 inch]
 Self-tapping screws: DIN 7513 [M 3x8]
 Sheet-metal screws: DIN 7971 [2.9x6.5]


OPTIONS

Bulk packaging is standard
 Custom design available

COMMON APPLICATIONS

Medical equipments
 Industrial equipments
 Industrial controls
 Test equipments
 Industrial computers
 Avionics & telecom


PHYSICAL CHARACTERISTICS

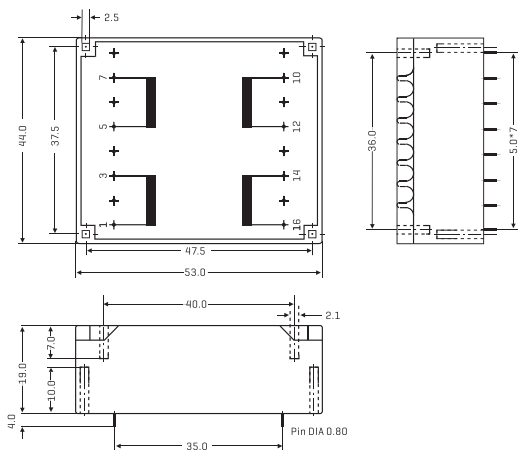

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]
FAUI300719	2*115	2*6/333	2*9.4
FAUI300720	2*115	2*9/222	2*14.0
FAUI300721	2*115	2*12/166	2*18.6
FAUI300722	2*115	2*15/133	2*23.3
FAUI300723	2*115	2*18/111	2*28.0
FAUI300724	2*115	2*24/83	2*37.4

TECHNICAL INFORMATION

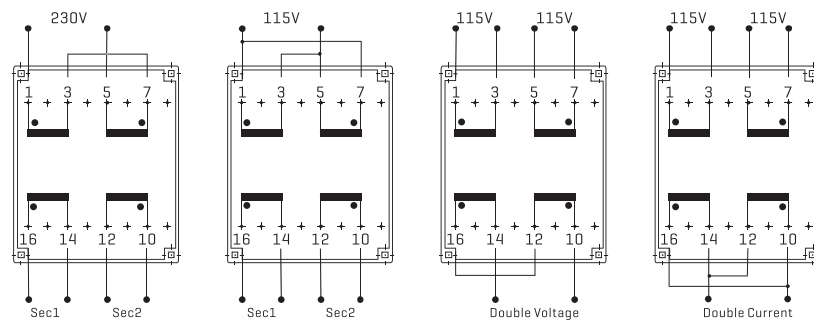

ALL DIMENSIONS IN MM