

MAGNETIC SHIELDED SURFACE-MOUNT POWER INDUCTORS FASDRH103-104 SERIES



FEATURES:

Magnetically Shielded Structure
Low DC Resistance
Large current up to 2.7A
Excellent Mechanical Strength
High Reliability and Excellent Solderability
Low and square Profile
High heat resistance

OPTIONS:

Packaging: Tape & Reel is standard
(Qty: 2000pcs)
Bulk packaging available for smaller quantities
Tolerance: 10% and 5% is standard
tighter tolerances available

COMMON APPLICATIONS:


VCRs, Notebook, DC/DC Converters
Video Digital Cameras
Communication System
Automotive Systems Power supplier
LCD PDP Televisions
Hard Disk Drives, Topset, XDSL
Network Systems
Computer Peripheral Equipment

ELECTRICAL CHARACTERISTICS


Part Number	L [μ H]	Test Freq [kHz]	DCR ohm Max	IDC Max A
FASDRH103-100M	10	100	0.0581	2.70
FASDRH103-120M	12	100	0.0721	2.25
FASDRH103-150M	15	100	0.0865	2.22
FASDRH103-180M	18	100	0.1161	1.90
FASDRH103-220M	22	100	0.1454	1.78
FASDRH103-270M	27	100	0.1759	1.63
FASDRH103-330M	33	100	0.2134	1.46
FASDRH103-390M	39	100	0.2689	1.32
FASDRH103-470M	47	100	0.2986	1.18
FASDRH103-560M	56	100	0.3358	1.10
FASDRH103-680M	68	100	0.4513	1.04
FASDRH103-820M	82	100	0.5138	0.94
FASDRH103-101M	100	100	0.7000	0.84
FASDRH103-121M	120	100	0.7650	0.76
FASDRH103-151M	150	100	0.8763	0.70
FASDRH104-1R3N	1.3	100	0.008	10.0
FASDRH104-2R5N	2.5	100	0.010	7.50
FASDRH104-3R8N	3.8	100	0.013	6.00
FASDRH104-5R2N	5.2	100	0.022	5.50
FASDRH104-7R0N	7.0	100	0.027	4.80
FASDRH104-100M	10	100	0.035	4.40
FASDRH104-150M	15	100	0.050	3.60
FASDRH104-220M	22	100	0.073	2.90
FASDRH104-330M	33	100	0.093	2.30
FASDRH104-470M	47	100	0.128	2.10
FASDRH104-680M	68	100	0.213	1.50
FASDRH104-101M	100	100	0.304	1.35
FASDRH104-151M	150	100	0.506	1.15
FASDRH104-221M	220	100	0.756	0.92
FASDRH104-331M	330	100	1.090	0.70

Note: 1. K=±10%, M=±20%, N=±30%

PHYSICAL CHARACTERISTICS



LAND PATTERNS

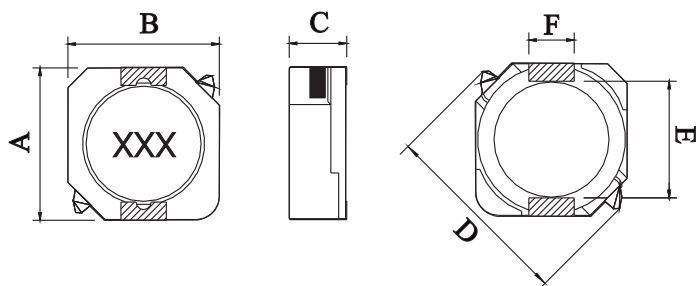

CONSTRUCTION



TECHNICAL INFORMATION

Inductance Testing: HP4284A [Equivalent acceptable]
DCR: QuadTech 1880 Milliohm meter
Q- HP4342A - SRF-HP4191A
IDC Max current is decreased 10% against its initial value
Operating temperature: -40°C to +105°C
Storage Temperature: -40°C to +105°C
Solder methods: Vapor Phase, Infrared Reflow
Resistance to soldering heat: 260°C for 10 seconds
Solvent resistance: Conforms to MIL-STD-202E
Marking: Inductance & Tolerance
Note: All specifications subject to change without notice.

DIMENSIONS IN: mm

Part number	A	B	C	D	E	F	G	H	I
FASDRH103	10.3Max	10.4Max	3.0Max	13.5Max	7.7	3.0	3.6	1.7	7.3
FASDRH104	10.3Max	10.4Max	4.0Max	13.5Max	7.7	3.0	3.6	1.7	7.3