


SPECIFICATION FOR APPROVAL

Material

Production:	Iron Powder Cores
FUAN.P/N:	KT400-8
AL:	60.0(nH/N ²)(±10%)
Material:	-8
Coating Color:	Yellow/Red
Coating material:	epoxy
Coating Breakdown Voltage:	800V, 0.5mA, 2Sec

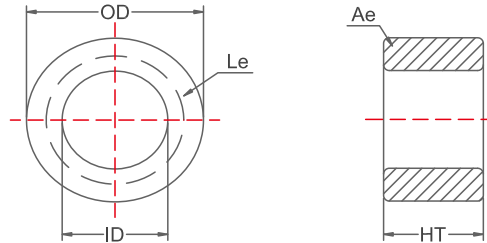


Physical Characteristics

After Coating			Le(cm)	Ae(cm ²)	V(cm ³)	W(cm ²)	Weight (g) (ref.)	Box Quantity (Pieces)
OD mm	ID mm	Ht mm						
102.0±0.75	57.2±0.75	16.5±0.75	25.000	3.460	86.400	2.137	572.83	30


Electrical Parameters(Typical) Temperature(25°C±2°C)

Test Item	Test Condition	Value(Typical)	Test Instrument
Inductance	φ0.29mm/20Ts, 10kHz/1V, I=0A (Evenly full windings)	24.0μH(±10%)	CH3302
DC-Bias	φ0.50mm/100Ts,10kHz/1V,L(10.0A)/L(0A)*100%(H=50Oe) (Evenly full windings)	82%(Min.)	WK3255B+WK3265B
Core Loss	250KHz/100Gs	55mW/cm ³ (Max.)	SY-8219
Q	φ0.50mm/100Ts, 200kHz/1V, I=0A (Evenly full windings)	25.0(Min.)	CH3302
Remarks	Set the internal resistance of LCR meter to 100Ω.		

DC-Bias Curves(Typical)

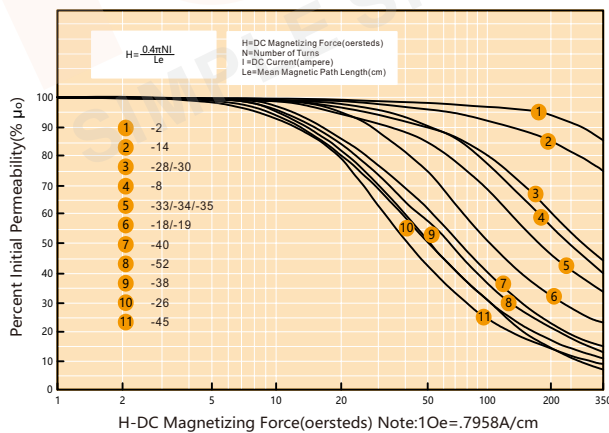

Core Loss Curves(Typical)

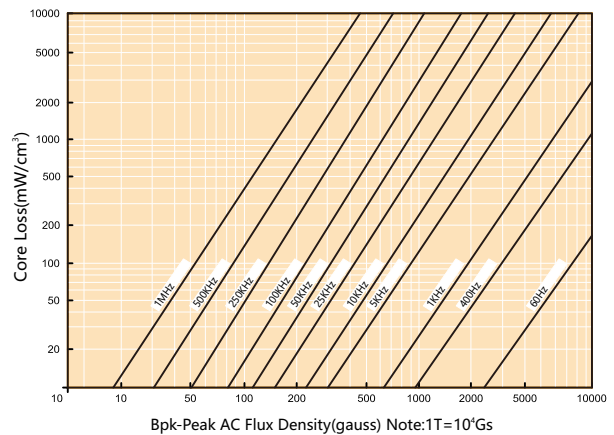

Iron Powder Cores is a magnetic core which use traditional production arts, after the pure powder which content of Fe is more than 99% surface insulation coating and then mixed pressed with organic binder. Because it hasn't been conducted in the high temperature, so it's used temperature is -65C ~ +125C. Products including permeability 10ui-100ui, toroid, E type,